User Manual

Mini Wi-Fi Smart Plug

V01	V02	V03	V04	V05	V06

Contents

Part 1: General

1.1. Specification

| Item	Description
Product Name	Mini Wifi Smart Plug
Applicable Model	V01, V02, V03, V04, V05, V06
Color	White
Voltage	100V-220V
Current	Max 10A
Wattage	Max 1100W (for 110V), 2200W (for 220V)
Plug Type	B-US style with ground plug

Power Button & Indicator Light
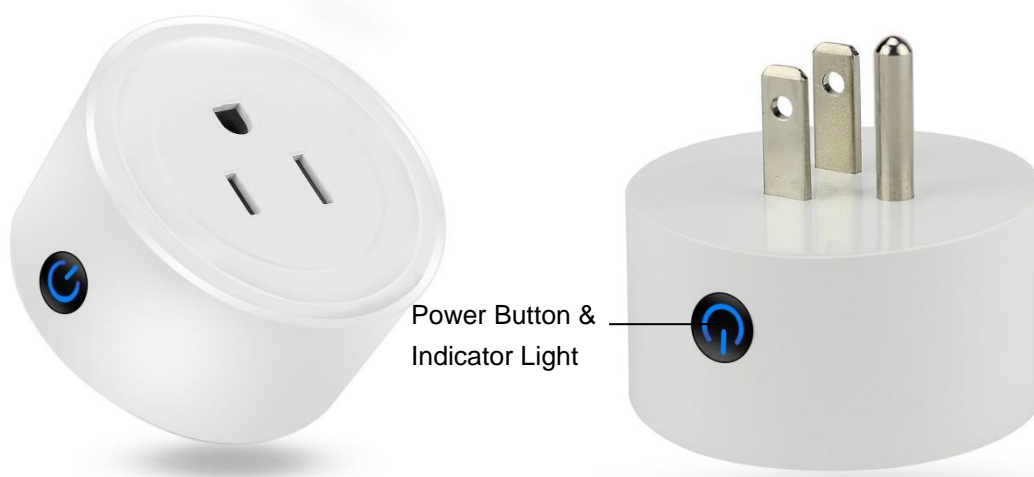
1.2. Main Features

◆ Works with Alexa and Google Assistant, Voice Control it ON/OFF

◆ ONLY works with 2.4 GHz Wi-Fi, DO NOT use it under 5GHz

◆ FREE iOS and Android App is available to control this smart plug anywhere

◆ Schedule and Timing the Smart plug to automatically turn on/off
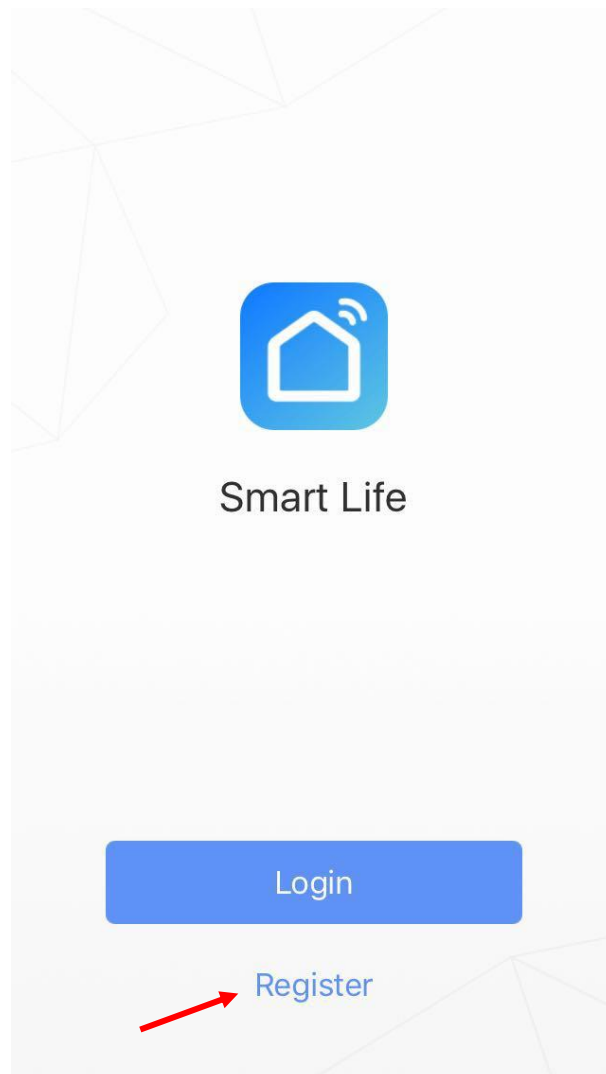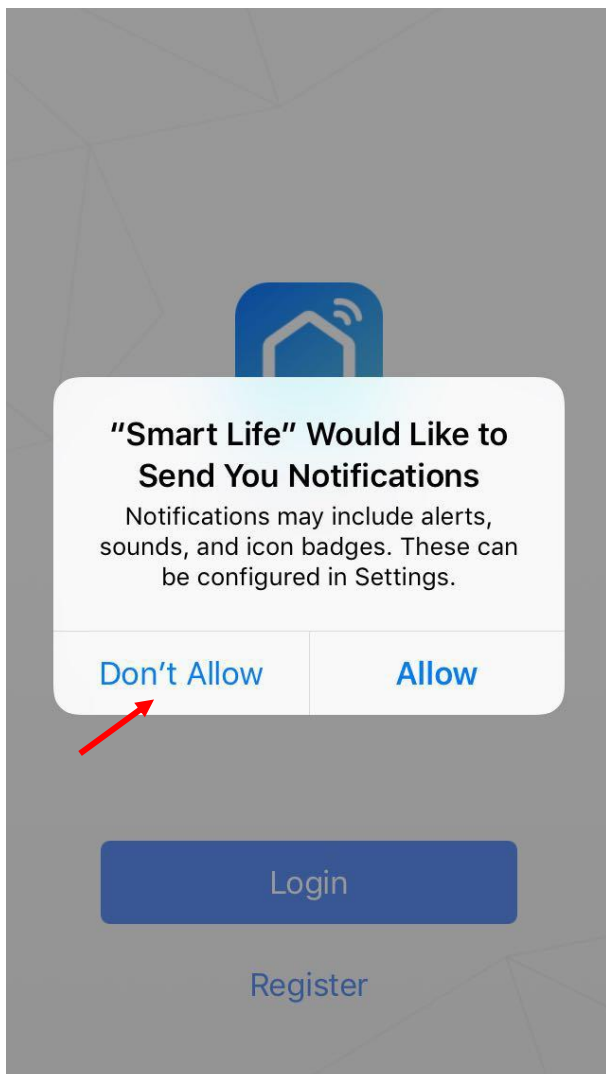
◆ Manually Turn on/off the plug by the side button

Part 2: Connect The Smart Plug to Wi-Fi

Step 1: **Download the App**

Scan the QR code or search "Smart life" in the App Store or Google Play
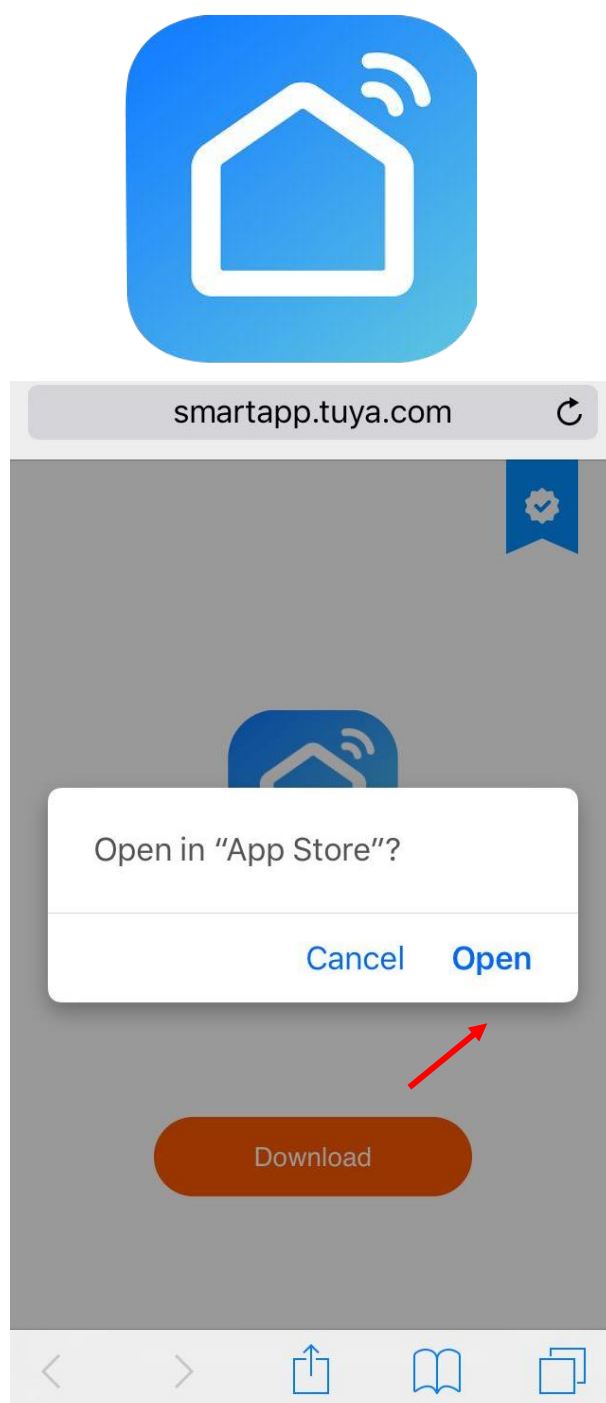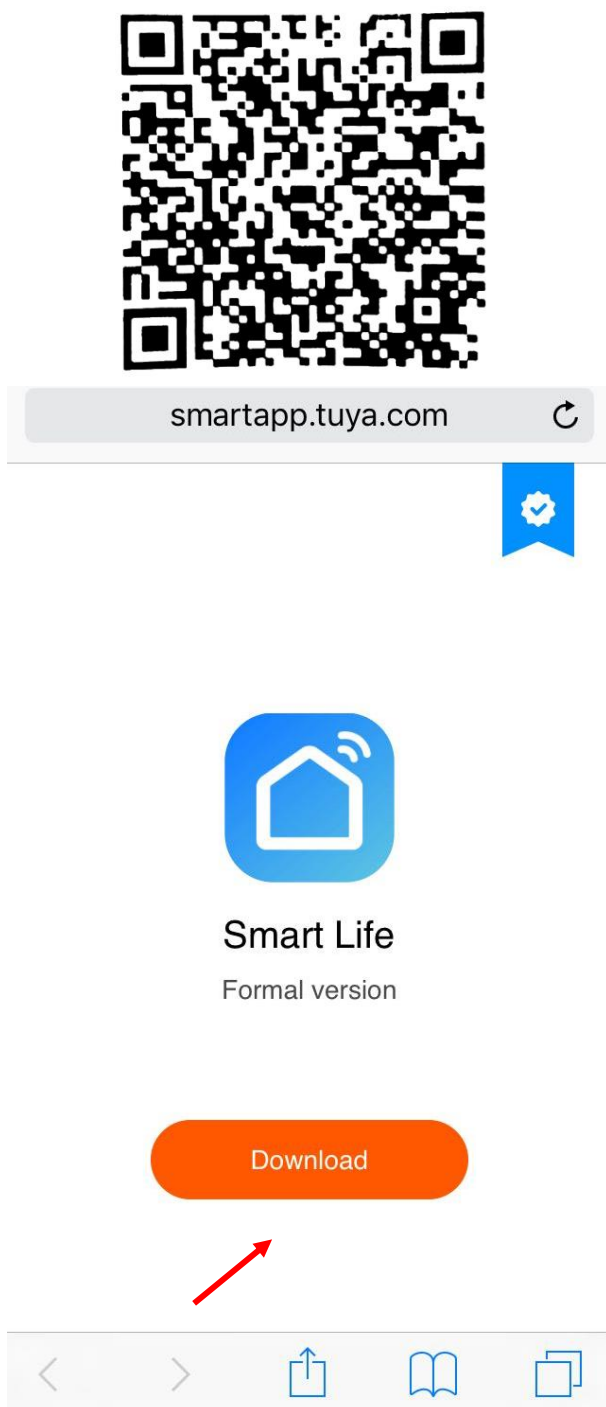
Step 2:   Register a New Account

Part 2: Connect Smart Plug to Wi-Fi

‹ Back   Register

USA   +1 ›

clever_things@hotmail.com

Next

Register and agree with
User Agreement and Privacy Terms

Register with phone number

or email address

‹ Back   Register

12345678abc   👁

Confirm

Password must contain

6-20 letters and numbers

q w e r t y u i o p

a s d f g h j k l

⇧ z x c v b n m ⌫

123 🌐 🎤   space   return

Part 2: Connect Smart Plug to Wi-Fi

Step 3: Plug in the Smart Plug and the indicator light flashes quickly.
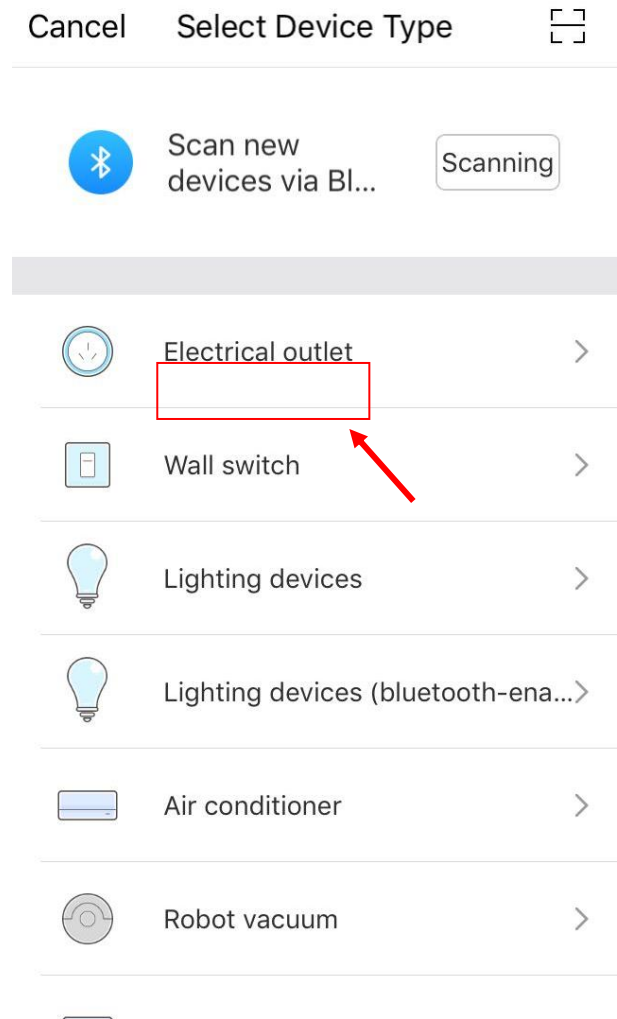
If the side button doesn't have blue light, press the button once to turn it on manually, then press the button and hold it for 5-6 seconds, and the light will blink again.

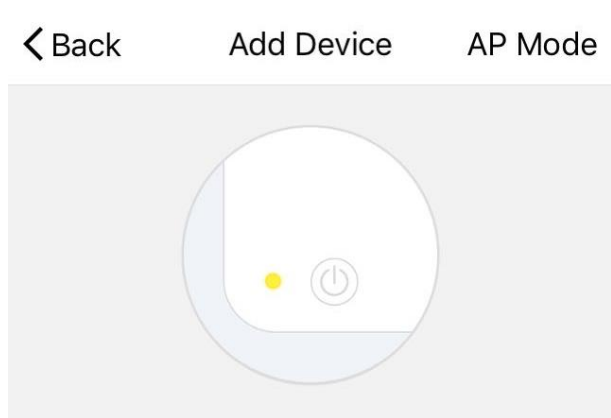**Step 4:** Press **✚** to Add a device in your App

(Smartphone should connect to 2.4GHz Wi-Fi).
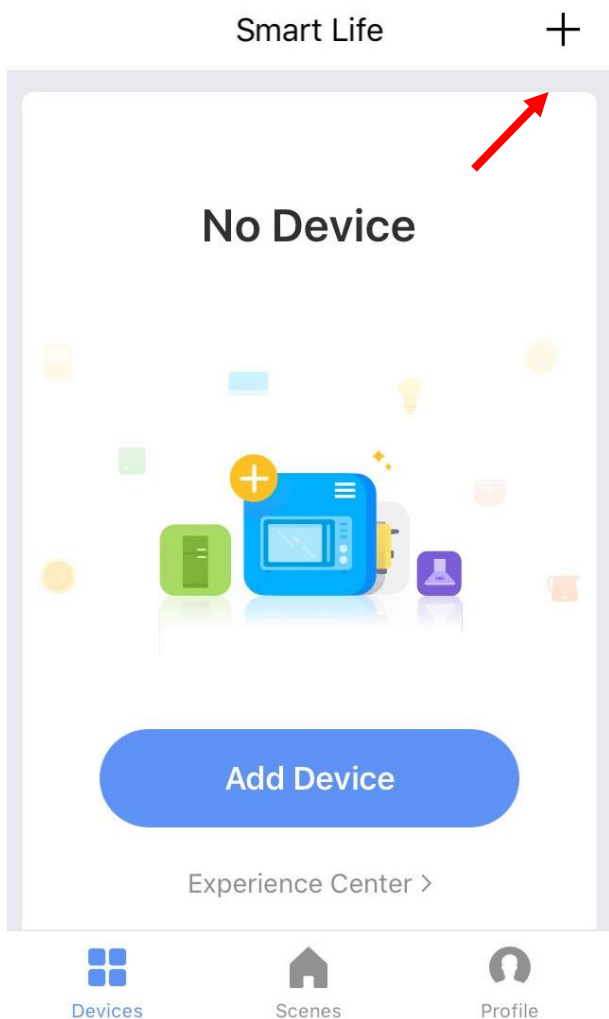
Step 5: Select "Electrical Outlet"

Part 2: Connect Smart Plug to Wi-Fi

Step 6: Confirm the indicator	**Step 7:** Enter the Wi-Fi Password (Your phone should be connected to the same Wi-Fi first)

Step 6: Confirm the indicator
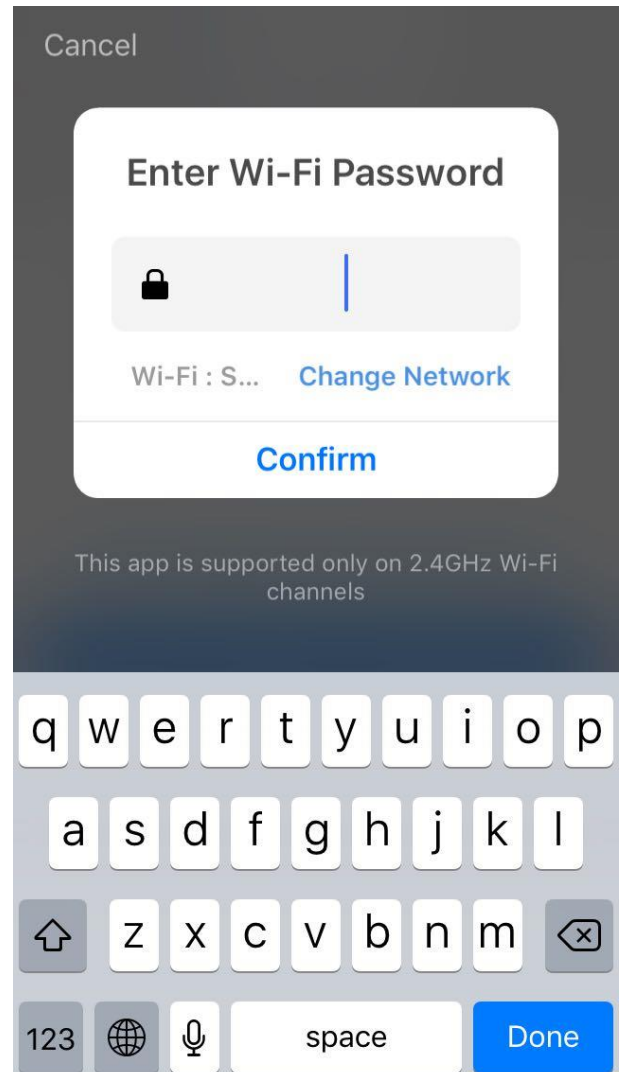
〈 Back   Add Device   AP Mode

Power on the device and confirm
that indicator light rapidly blinks

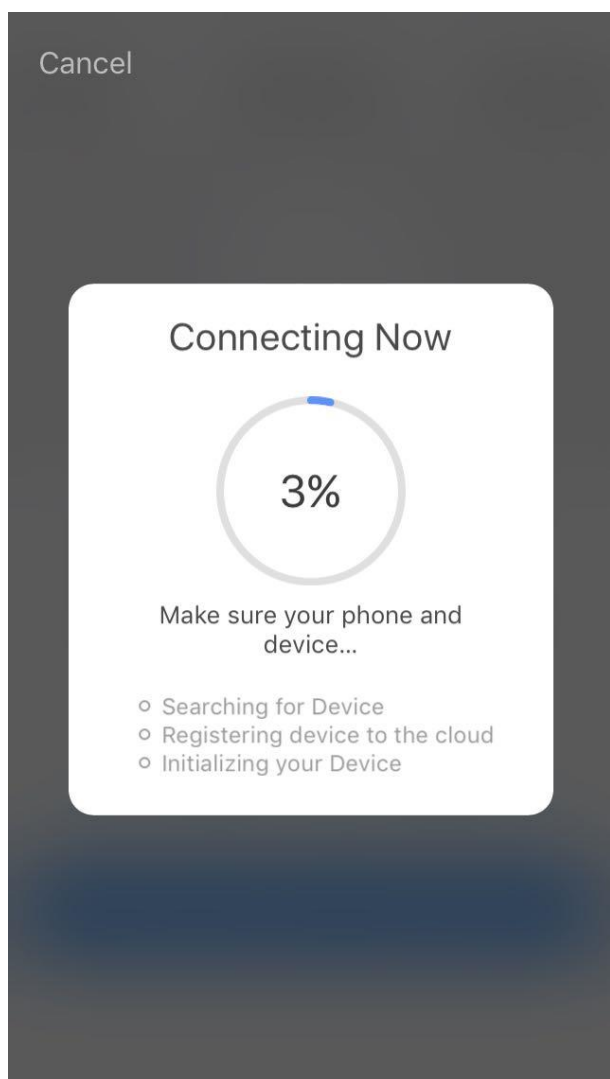How to make indicator rapidly blink

Confirm indicator rapidly blink

Step 7: Enter the Wi-Fi Password (Your phone should be connected to the same Wi-Fi first)

Cancel

Enter Wi-Fi Password

Wi-Fi : S...   Change Network

Confirm

This app is supported only on 2.4GHz Wi-Fi channels

q w e r t y u i o p
a s d f g h j k l
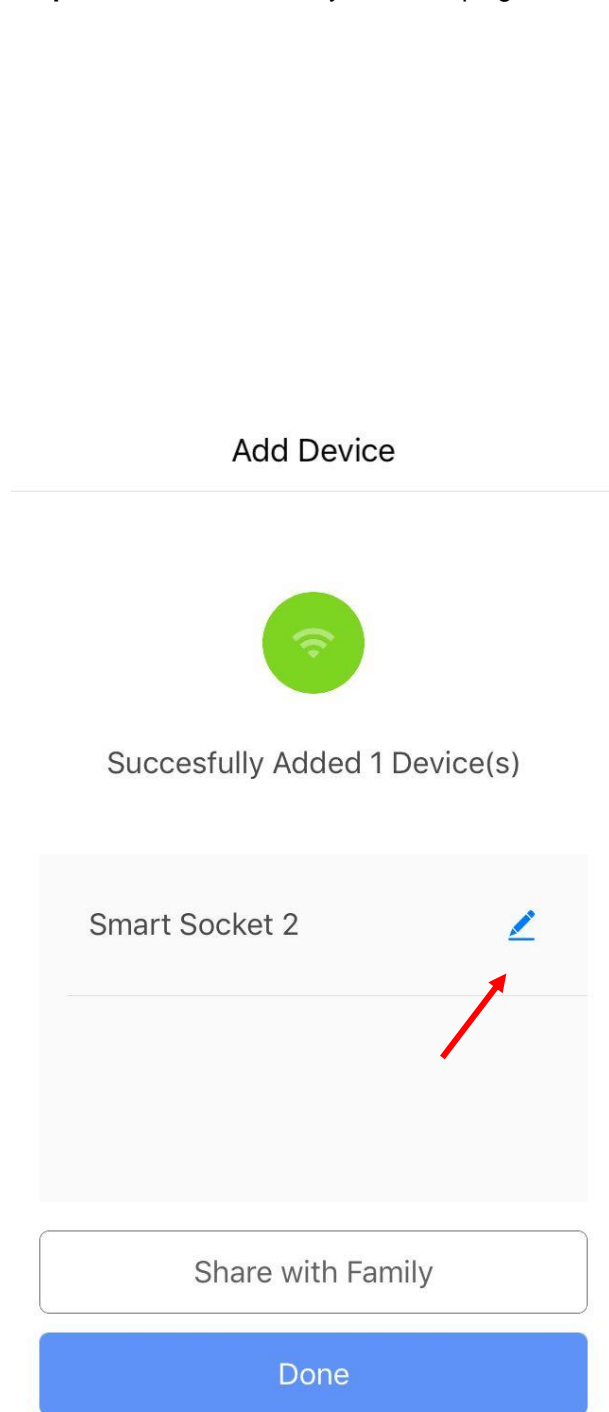z x c v b n m

123   space   Done

**Step 8:**   It will be 100% in around 20 seconds.

-----If it is failed,

1. reconnect
2. wait it goes to around 10%,
3. Press the bottom on the plug for 5 seconds, it will blink again. Then release it, the plug will be connected.
4. If the problem continues, repeat step 3 to step 7 and contact the seller for help.

Cancel

Connecting Now

3%

Make sure your phone and device...

○ Searching for Device
○ Registering device to the cloud
○ Initializing your Device

Step 9:   Edit the name of your smart plug

Add Device

Succesfully Added 1 Device(s)

Smart Socket 2

Share with Family
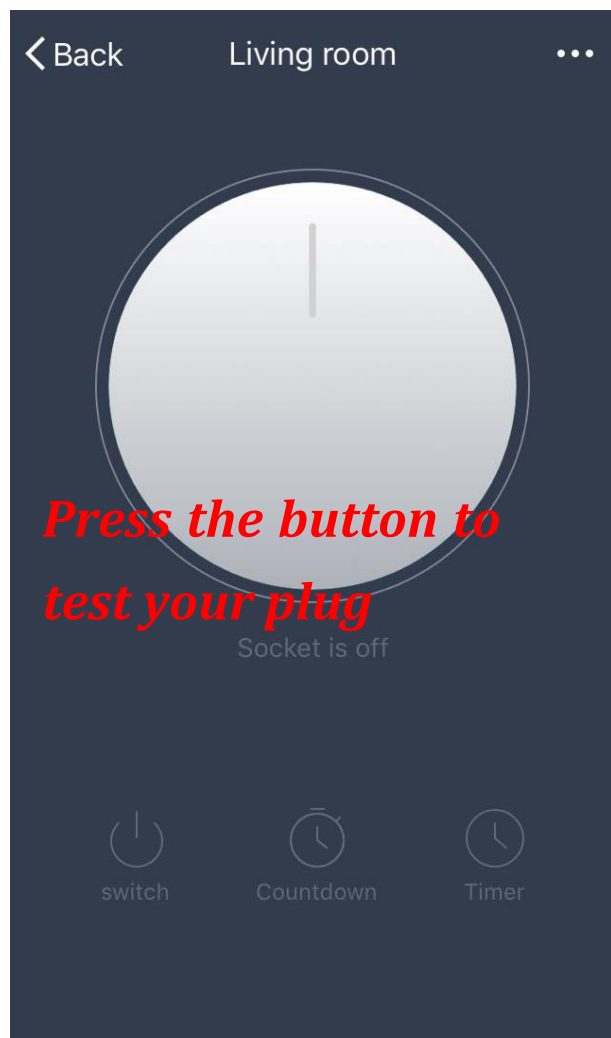
Done

Part 2: Connect Smart Plug to Wi-Fi

Step 10: Delete the default name and input a new one(Simple Names will be identified easily by Echo or Google Home）
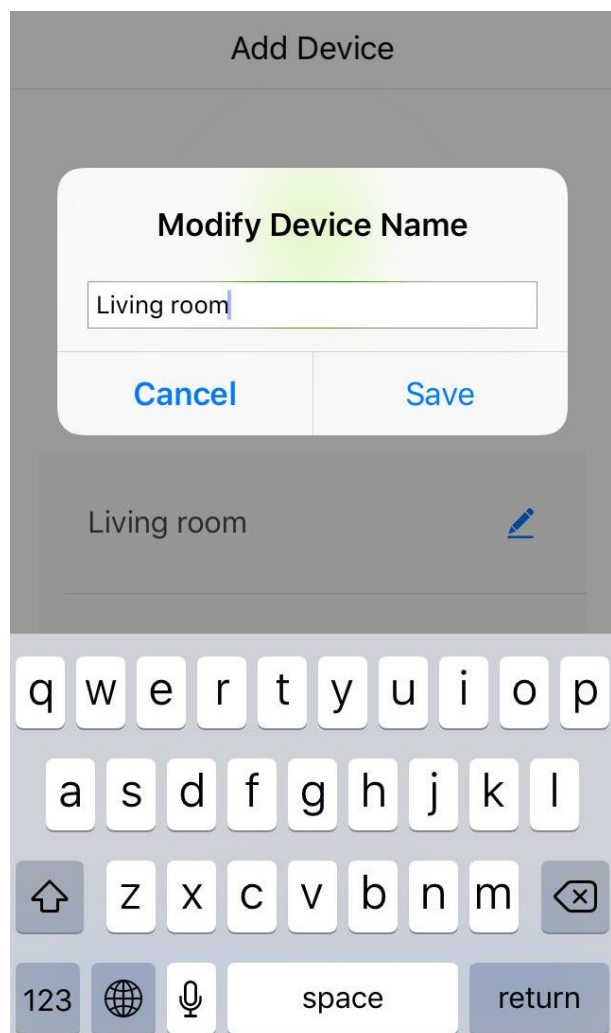
Step 11: Press Done
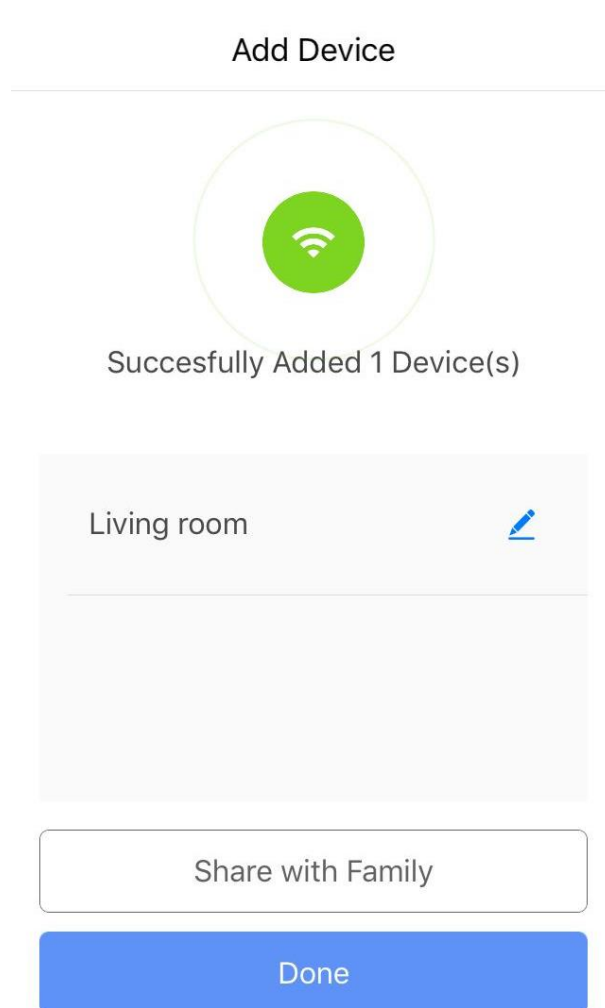
Step 12: Your plug is connected and you can control it by this App. If you need voice control, please refer Part 3 for Alexa, Part 4 for Google Assistant.

Press the button to test your plug

Congratulations! Now you can turn on/off the plug via App on your smartphone.

FQA:

1. **Cannot download the right App.**
   A: Please come back to step 1 and download by scanning the QR code. Please use smartphone rather than tablet.

2. **Cannot discover the smart plug by App.**
   A: Make sure that your Wi-Fi router is 2.4GHz, the phone connects to the same Wi-Fi, the indicator flashes quickly

3. **No blue light comes out from the indicator button**
   A: Please plug it in another socket, and press the side button once to manually turn on. Press and hold it 5-6s, then the blue light will blink quickly.

4. **Will the indicator blink forever if I don't connect it to my cellphone?**
   A: NO, it is set 3 minutes to connect the App. If you plug in it then go away to do some other things, the plug will change into a protection and power save mode, the indicator light will OFF.
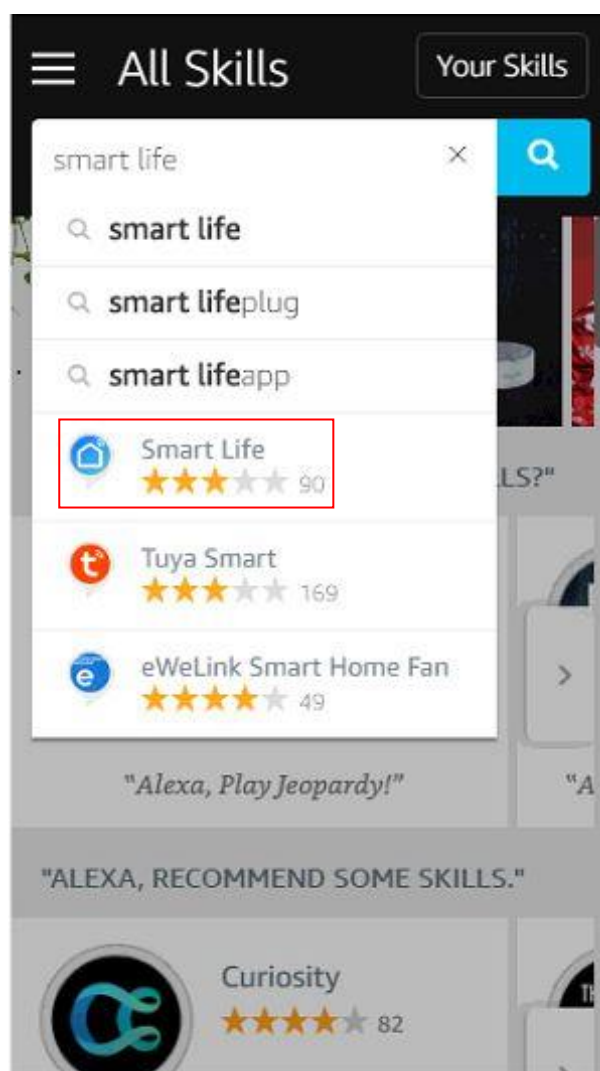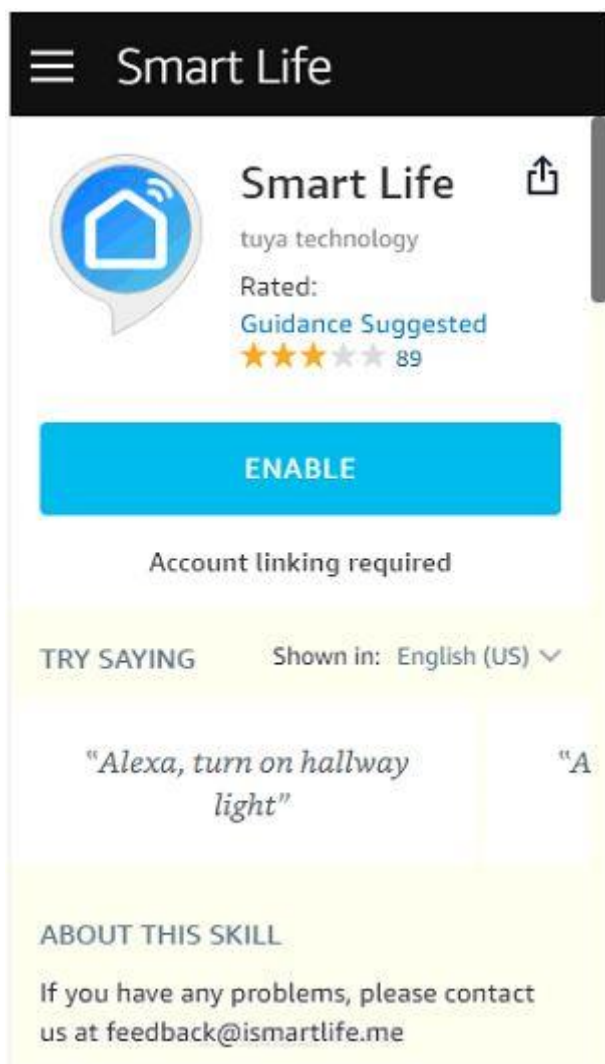
Part 3: Connect The Smart Plug to Alexa

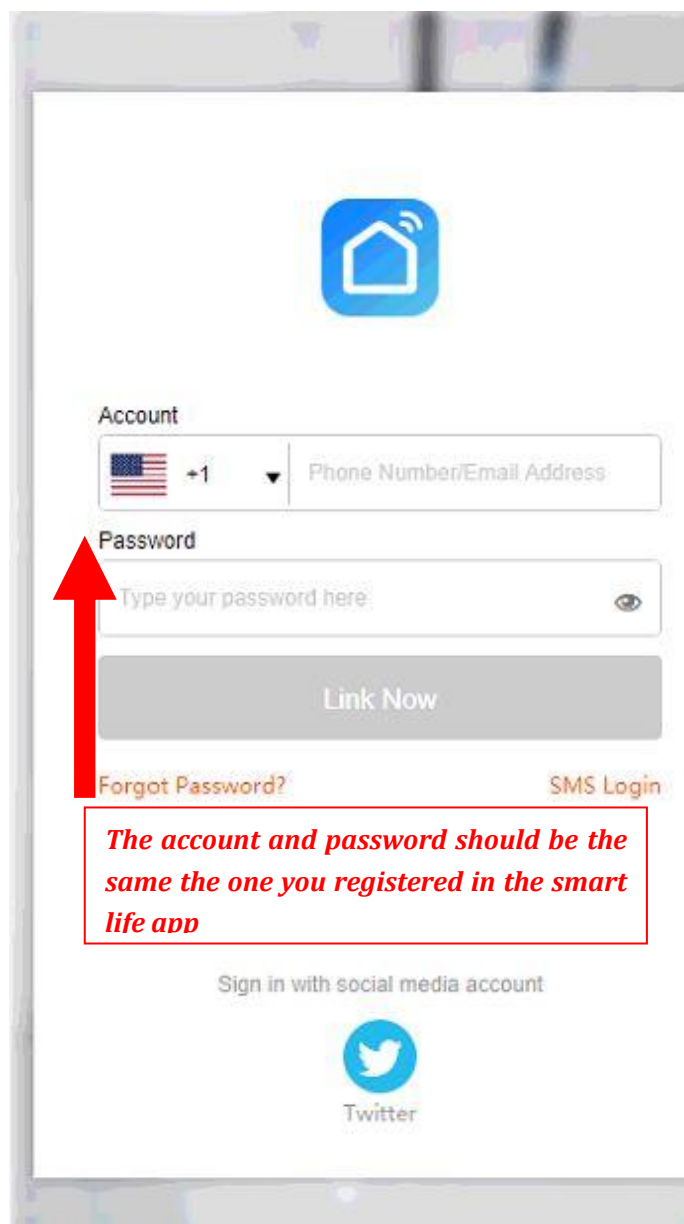**Step 1:** Log in your Alexa account on a smartphone or a computer, then click Skills
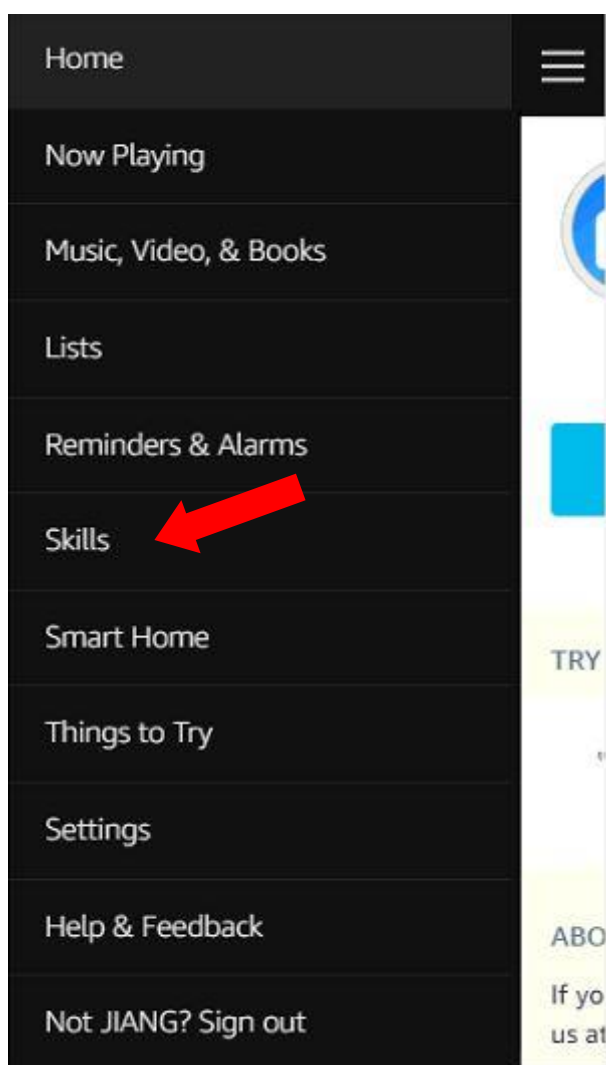
Step 2: Search "Smart Life" and select the right one according the blue logo (same with App)

Step 3: Enable the skill

Step 4: Login the account you registered on the App in Part 2, then click "Link Now"

The account and password should be the same the one you registered in the smart life app

Part 4: Connect Smart Plug to Google Home

Step 5: The Account is linked successfully, then tap Authorize to Complete.

**Step 6:** Congratulations! You can use Alexa Devices (Echo) to control the Plugs you connected in the App.
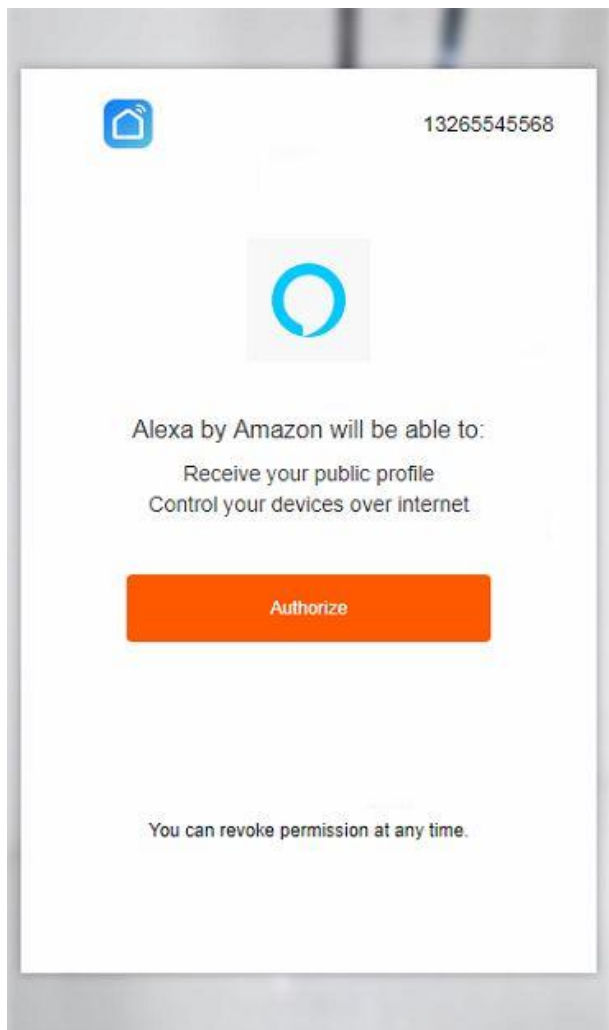
● If you want to delete or add new plugs, please delete or add them in the Smart Life App (Part 2), the Alexa Side will synchronize automatically.

● If you cannot see the name plugs in the Devices List in Alexa Page, you can click "Discover" in Alexa Page, it will synchronize from the Smart Life App.
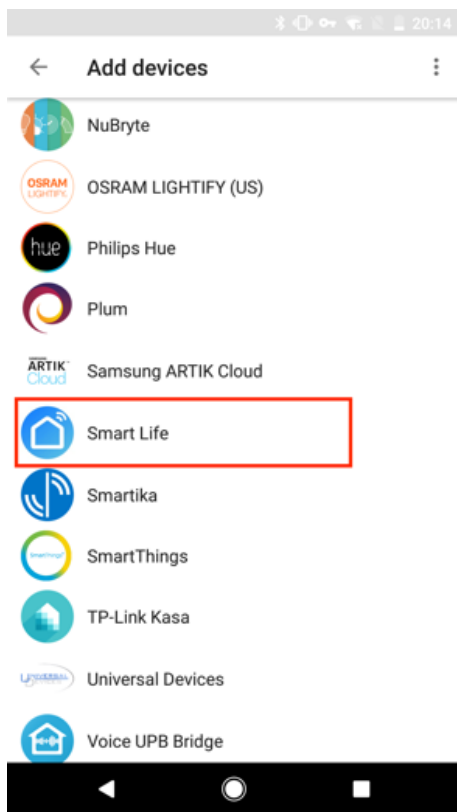
Part 4: Connect your Smart Plug to Google Home

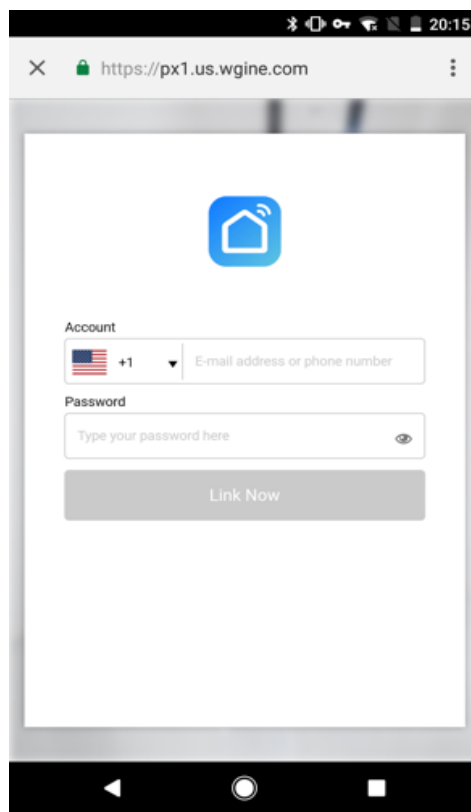
Part 2 must be completed before doing this part 4

Step 1: Tap "Home Control" in the hamburger menu on the Google Home app's home page, then tap "+".
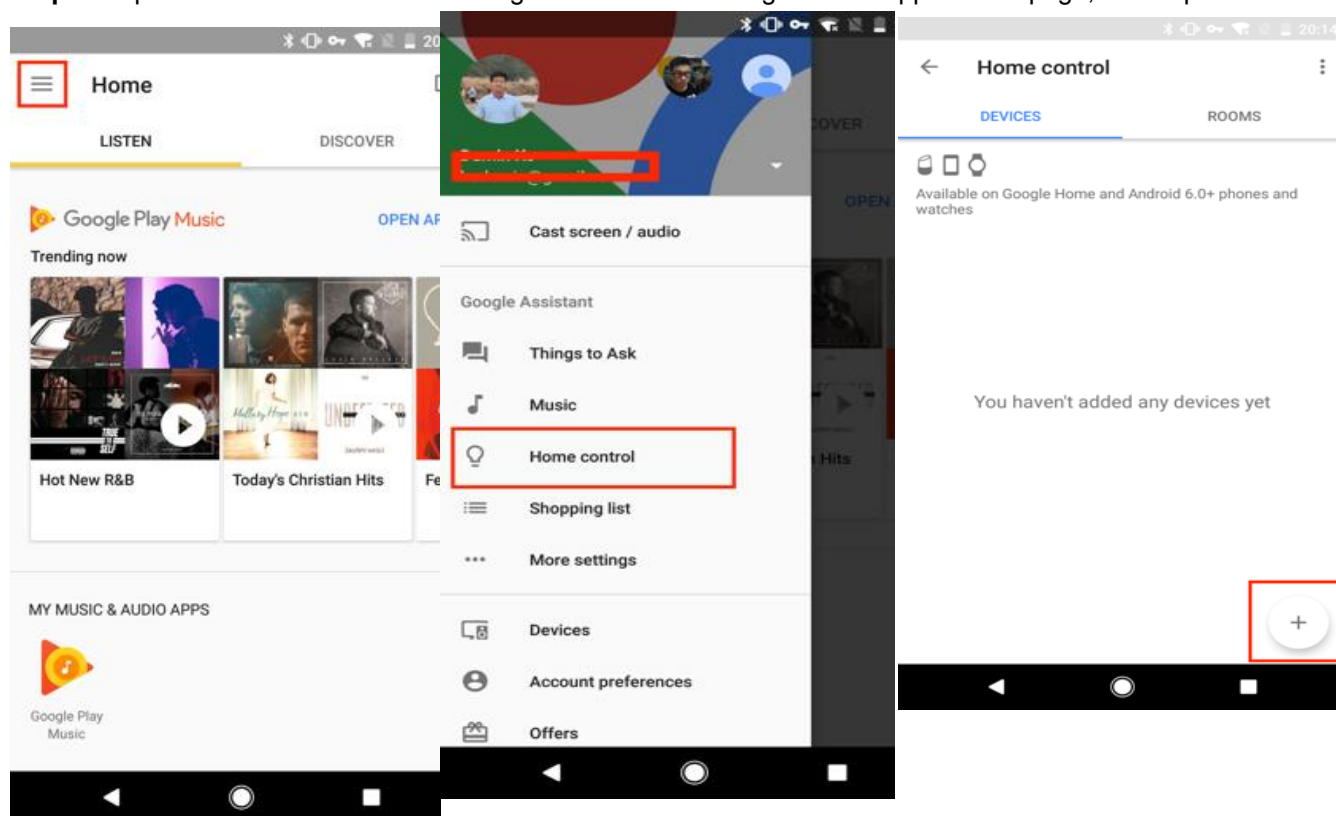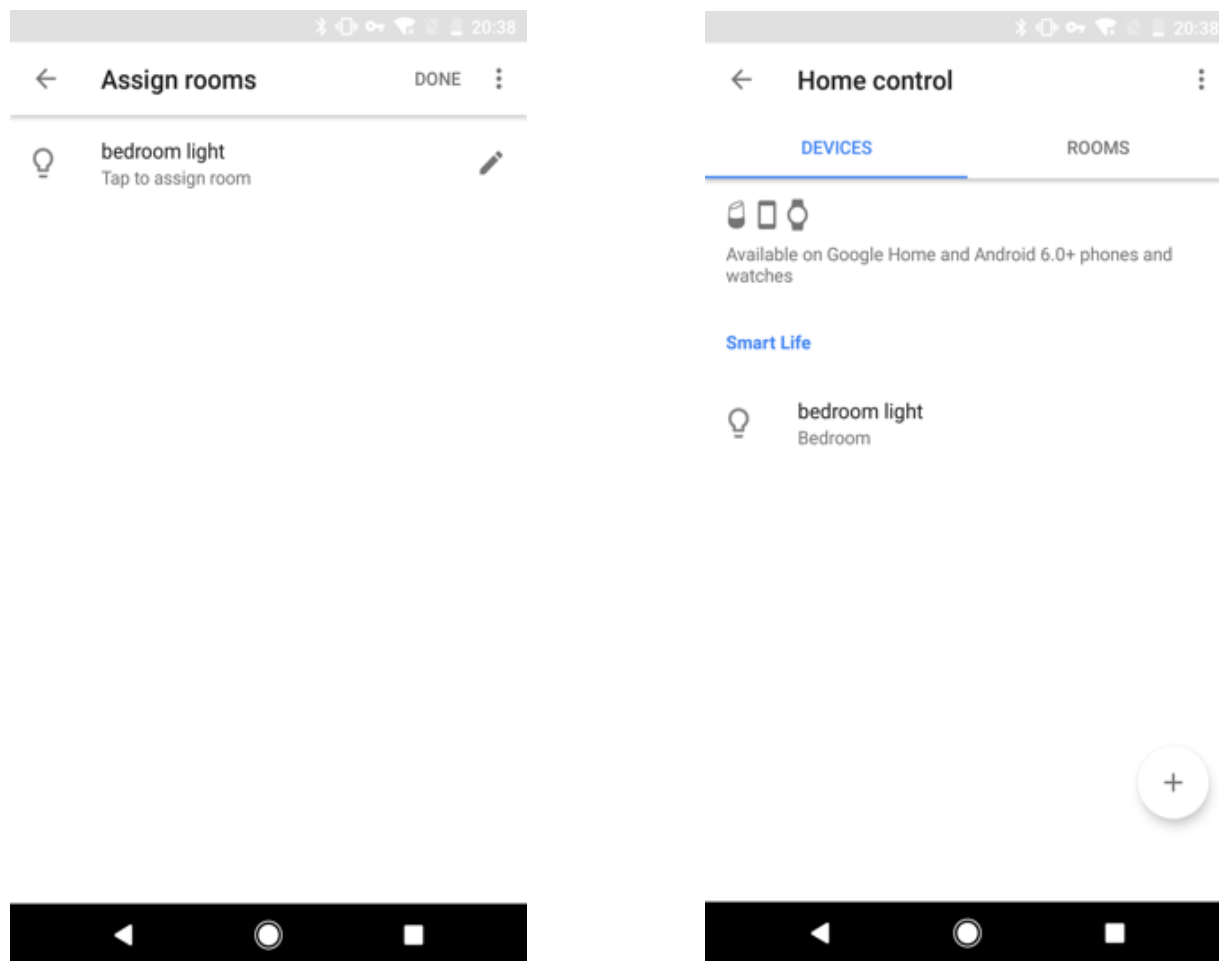
Step 2: Find "Smart Life" in the list.

Step 3: Type your Smart Life account and password you registered in Part 2, then tap "Link Now".

Step 4: After you assign rooms for devices, your devices will be listed in the Home Control page.

Step 5: Control your smart devices through Google Home

Now you can control your smart devices through Google Home. Take bedroom light as the example, the supported voice commands are as below:

Ok Google, turn on/off bedroom light.

Warning:

Plug in fully to the wall outlet while using

Do not insert a conductor or other tools to the socket hole

If there is radio frequency interference, it might affect the operation

Indoor use only

Do not use in bathroom and other damp locations

Please ensure the security of the electricity, resistive load current cannot be higher than 10A

Please keep the device out of the reach of children to avoid danger.