User Manual

Wi-Fi Smart Wall Switch

Contents


Part 1: General3			
1.1.	Specification	3	
1.2.	Main Features	3	
Part 2: I	nstallation and Wire Connection	4	
Part 3: Connect the Smart Switch to Wi-Fi5			
Part 3: Connect the Smart Switch to Alexa13			
Part 4: Connect your Smart Switch to Google Home16			

Part 1: General

1.1. Specification

Item	Description
Product Name	Wifi Smart Switch
Model	S01
Color	White
Voltage	100V-220V
Current	Max 15A
Wattage	Max 1500W (for 110V), 3300W (for 220V)

1.2. Main Features

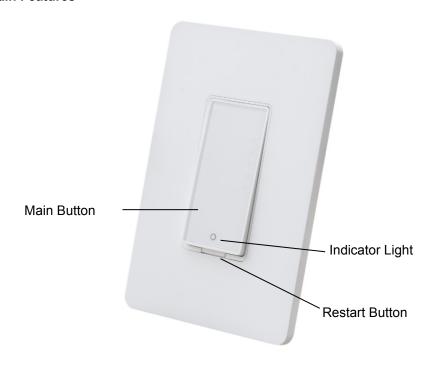


- ♦ Works with Alexa and Google Assistant, Voice Control it ON/OFF
- ONLY works with 2.4 GHz Wi-Fi, DO NOT use it under 5GHz
- ◆ FREE iOS and Android App is available to control this smart switch anywhere
- ◆ Schedule and Timing the Smart switch to automatically turn on/off
- ◆ Manually Turn on/off the switch by the Main Button
- ♦ Restart the Switch

Part 2: Installation and Wire Connection

Notice:


- 1. As the switch needs power for itself, three lines must be connected (one Live Line, one Load Line and one Neutral Line);
- 2. Please use the wire nuts to make the copper conductors fully concealed;
- 3. If you really cannot find out a Neutral Line in your Power Line Socket, STOP installing the switch and consult with a professional electrician or contact our service team.
- **Step 1:** Turn off power at the circuit breaker that controls the light switch. Use voltage tester to **confirm no voltage** is present.
- Step 2: Remove existing faceplate and light switch, then identify Live/Load, Neutral and Ground lines.
- Step 3: Connect the Smart Switch wiring with the provided wire connectors as follows:
 - Two **black wires** from the switch to the available Live lines via the wire nut, and wrap electrical tape around the wire nuts to make sure the copper conductor is fully concealed.
 - Green wire on switch (Ground Line) to Ground line,
 - White wire on switch (Neutral Line) to Neutral line.).

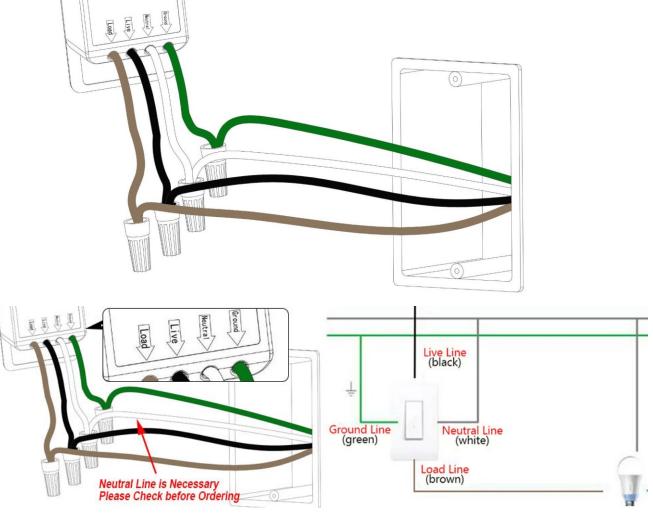


Part 3: Connect the Smart Switch to Wi-Fi

Step 1: Download the App


Scan the QR code or search "Smart life" in the App Store or Google Play

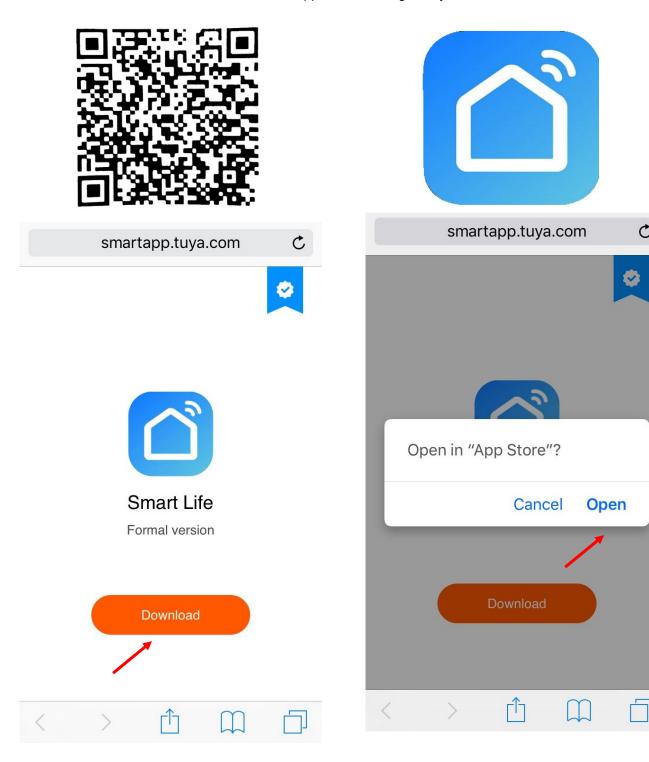

Step 2: Register a New Account

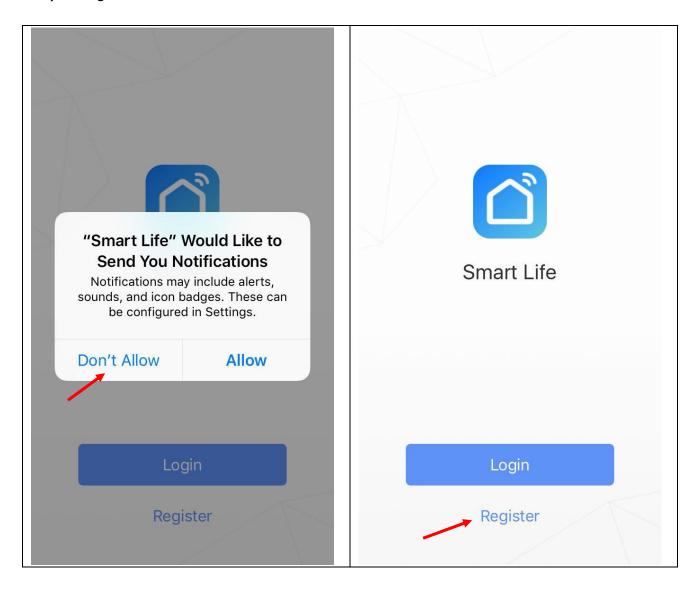


Part 3: Connect The Smart Wall Switch to Wi-Fi

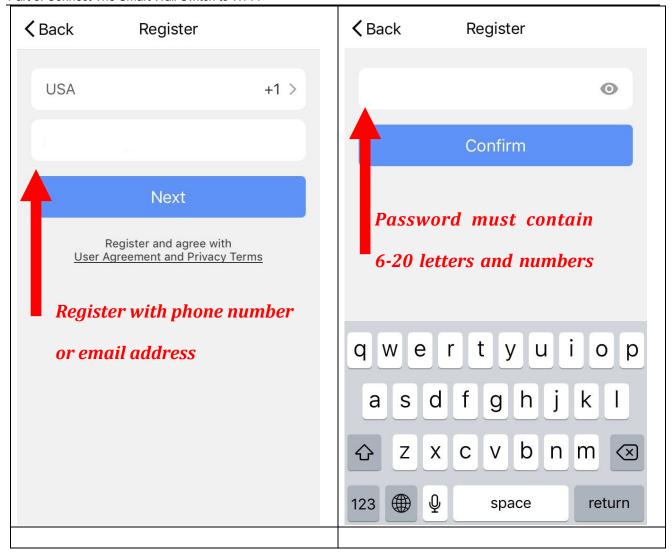


Step 3: Turn on the power at the circuit breaker and the indicator light (Blue) flashes quickly. If not, press the main button and hold it for 5 seconds.

Step 4: Tap + to Add a device in your App (Smartphone should connect to 2.4GHz Wi-Fi). ●●●●○ 中国电信 令 11:02 ⊕ 33% ■ Smart Life No Device **Add Device** Experience Center > Devices Profile

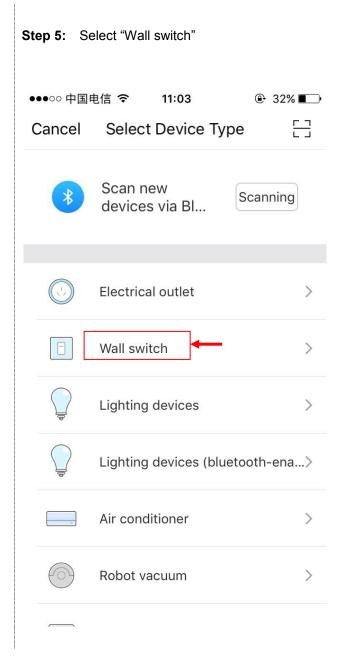

Step 6: Confirm the indicator blinks quickly

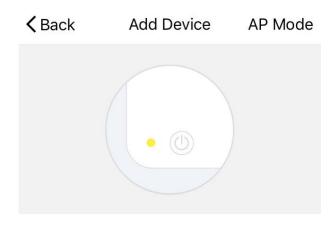


Power on the device and confirm that indicator light rapidly blinks

How to make indicator rapidly blink


Confirm indicator rapidly blink

Step 7: Enter the Wi-Fi Password (Your phone should have connected to the same Wi-Fi first)

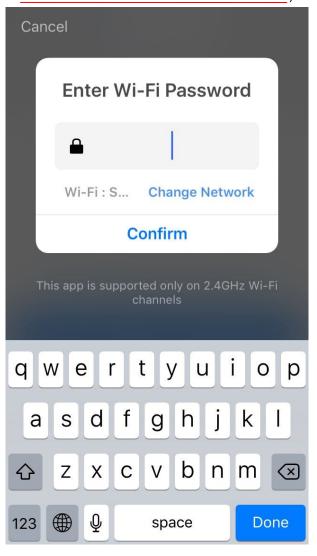


Step 8: It will be 100% in around 20 seconds. ----*If it fails*,


- 1. reconnect
- 2. wait it goes to around 10%,
- Press the bottom on the switch for 5 seconds, it will blink again. Then release it, the switch will be connected.
- 4. If the problem continues, repeat step 3 to step 7 and contact the seller for help.

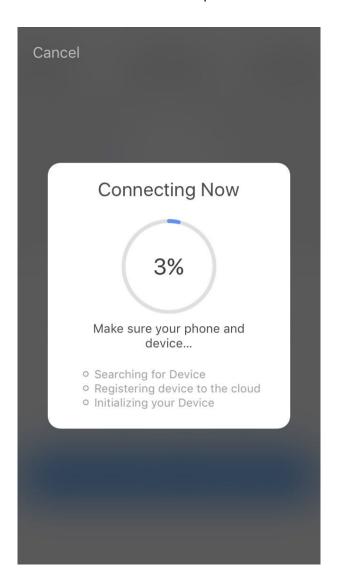


Step 9: Edit the name of your smart switch

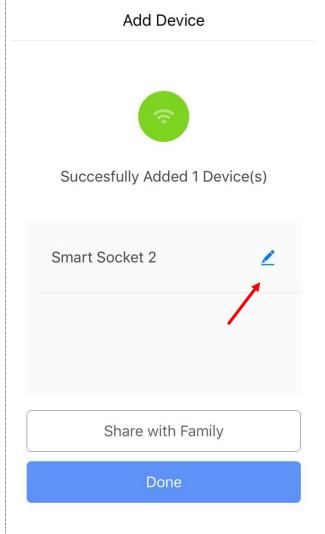

Step 10: Delete the default name and input a new one(Simple Names will be identified easily by Echo or Google Home)

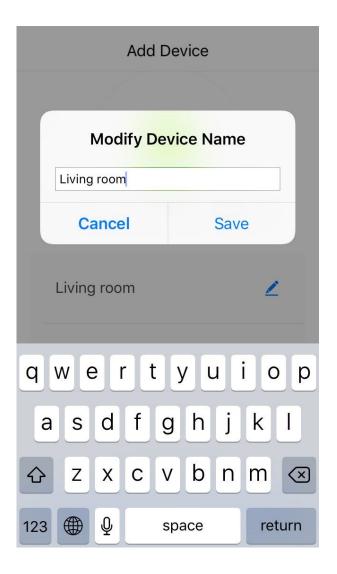

Step 11: Tap Done

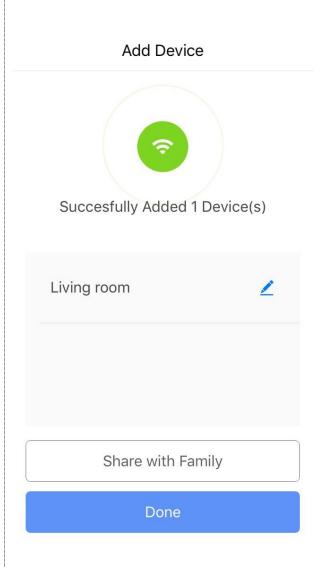

Step 12: Your switch is connected and you can control it by this App. If you need voice control, please refer Part 3 for Alexa, Part 4 for Google Assistant.

Congratulations! Now you can turn on/off the smart wall switch via App on your smartphone.

FQA:


- 1. Cannot download the right App.
- **A:** Please come back to step 1 and download by scanning the QR code. Please use smartphone rather than tablet.
- 2. Cannot discover the smart wall switch by App.
- **A:** Make sure that your Wi-Fi router is 2.4GHz, the phone connects to the same Wi-Fi, the indicator flashes quickly
- 3. No blue light comes out from the indicator button
- **A:** Please check the wire connection and press the reset button if necessary, then the blue light will blink quickly.

Part 3: Connect the Smart Switch to Alexa




gillerion sullesian sulles


Step 1: Log in your Alexa account on a smartphone or a computer, then tap Home → Skills

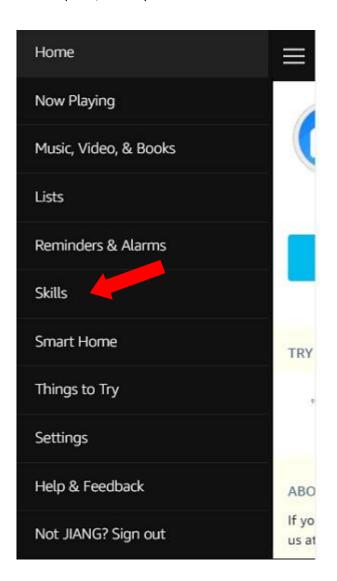


Step 2: Search "Smart Life" and select the right one according the blue logo (same with App)

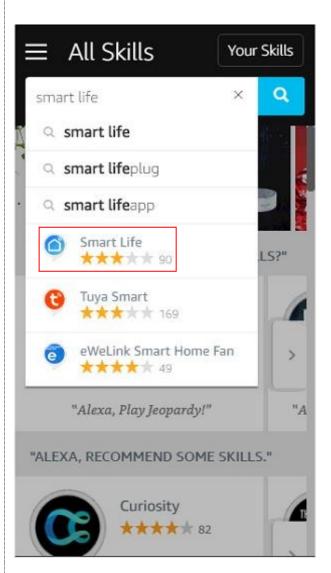


Step 3: Enable the skill

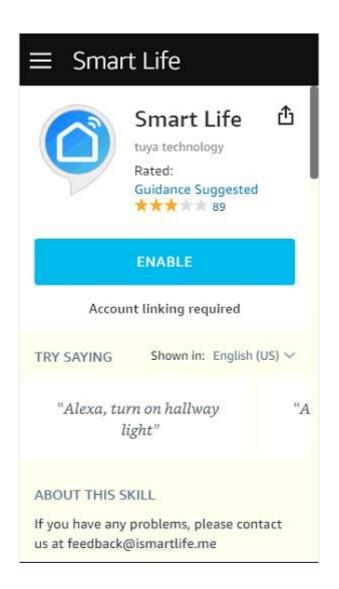

Step 4: Login the account you registered on the App in Part 2, then click "Link Now"

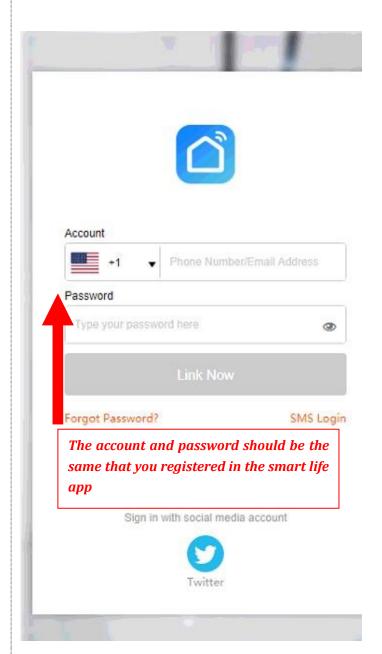

Step 5: The Account is linked successfully, and then tap Authorize to Complete.

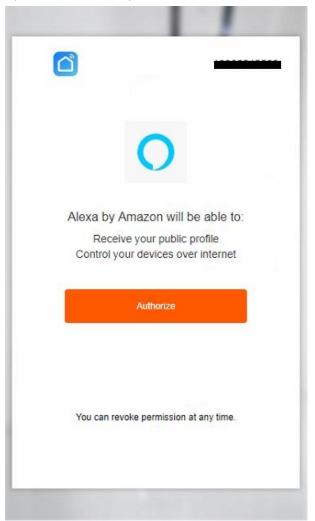

Step 6: Congratulations! Alexa Devices (Echo) can control the switch ON/OFF.

- If you want to delete or add new switchs, please delete or add them in the Smart Life App (Part 2), the Alexa will synchronize automatically.
- If you cannot see the name of switches in the Devices List in Alexa Page, you can click "Discover" in Alexa Page, it will synchronize from the Smart Life App.


Part 4: Connect your Smart Switch to Google Home







Part 2 must be completed before doing this part 4

Step 1: Find "Home Control" in the hamburger menu on the Google Home app's home page -> Home Control -> then tap "+".

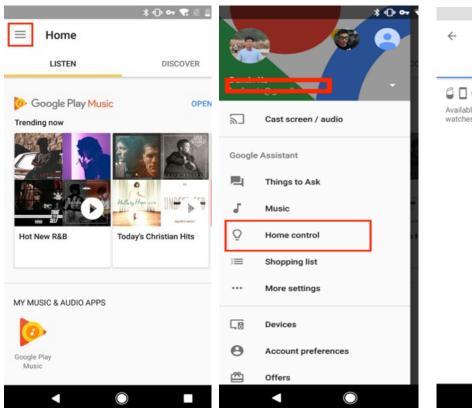

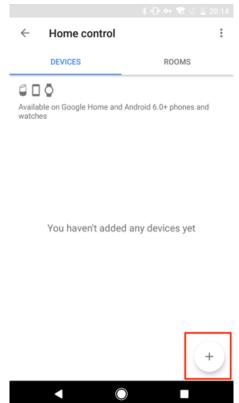


Step 2: Find "Smart Life" in the list.

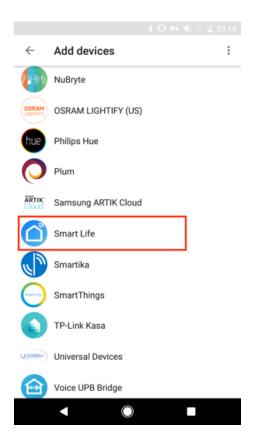

Step 3: Input your Smart Life account and password you registered in Part 2, then tap "Link Now".



Step 4: After you assign rooms for devices, your devices will be listed in the Home Control page.

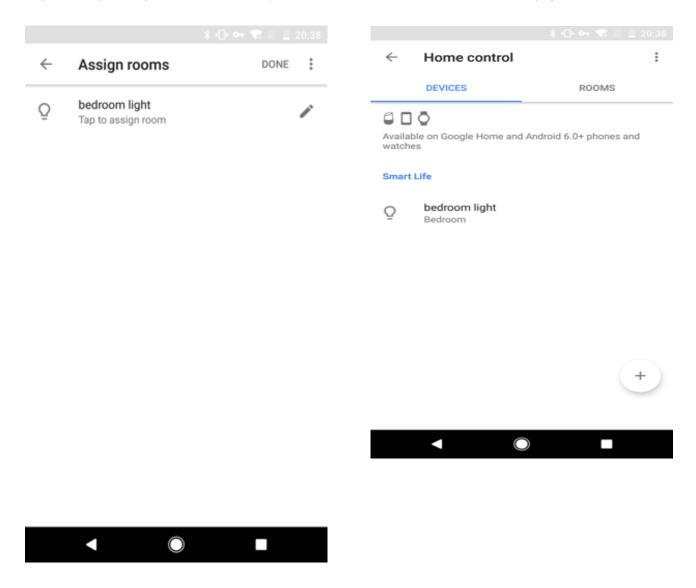

Step 5: Control your smart devices through Google Home

Now you can control your smart devices through Google Home. If you set the switch name as "bedroom light", the supported voice commands are as below:

Ok Google, turn on bedroom light.

Ok Google, turn off bedroom light.

Warning:

Please install it by a professional electrician

If there is radio frequency interference, it might affect the operation

Indoor use only

Do not use in bathroom and other damp locations

Please ensure the security of the electricity, resistive load current cannot be higher than 15A

Please keep the device out of the reach of children to avoid danger.