


READ HERE!!!

1. Confirm that both the Master and Add-on Switch work well manually (ON/OFF, Dim). If not, go back to the wiring part.
2. 2.4G WiFi is available. **NOT** support 5G (802.11av)

Step 1: Set the Switch to Easy Pairing Mode

1. Press the tiny restart button under the main power button to restart the switch. You will see the indicator is in constant RED.
2. Press and hold the power button for 5-8s until the indicator **blinks quickly** in RED.

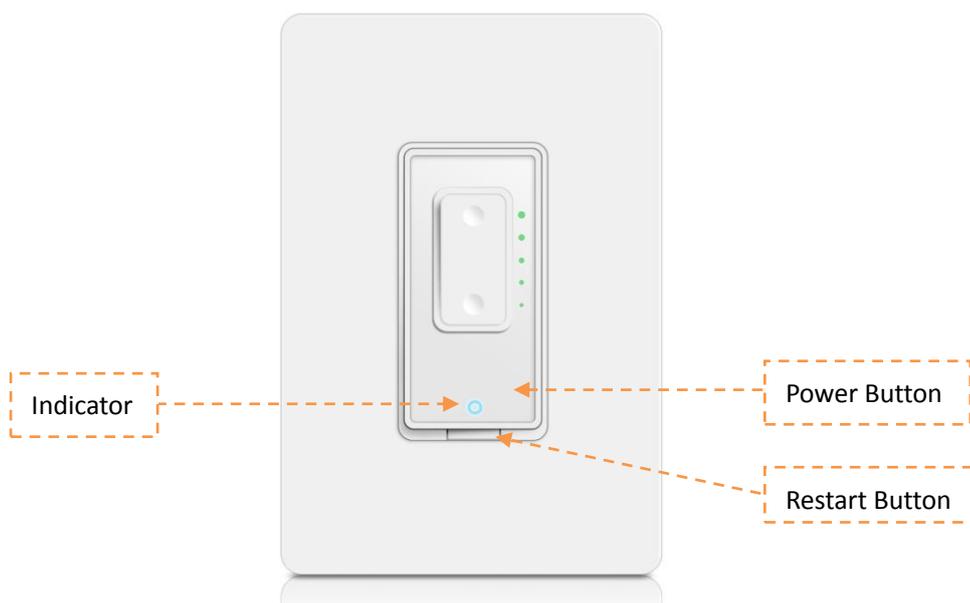





Part 3 - Wi-Fi Connection

Step 2: Pair the switch on App

1. Confirm that you have downloaded the right Smart Life App (Same Logo as the right side)
If not, download it from the links

iPhone: <https://itunes.apple.com/us/app/smart-life-smart-living/id1115101477?mt=8>

Android: https://play.google.com/store/apps/details?id=com.tuya.smartlife&hl=en_US

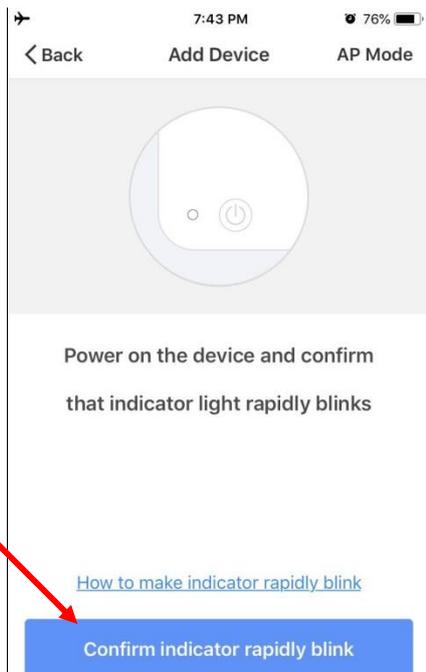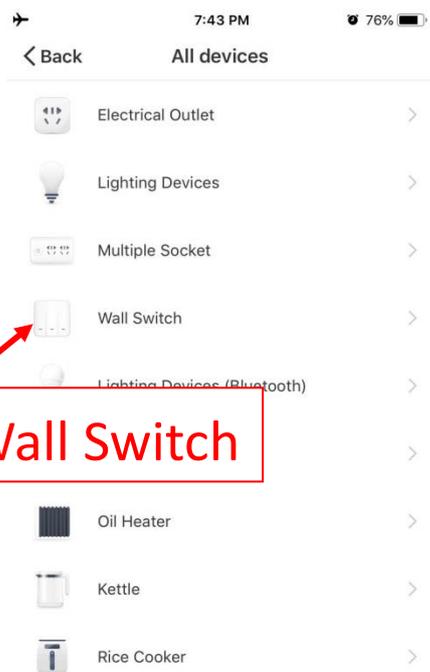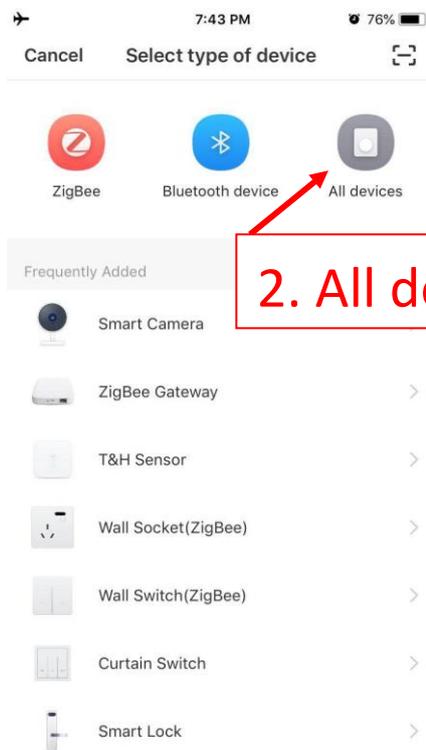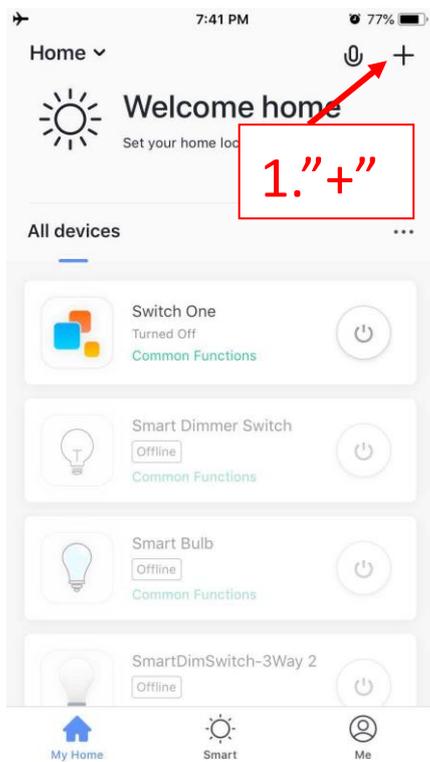

QA:

Q1: I follow all of the process above, but cannot get the switch connect to the WiFi (2.4G). Any suggestions?


A: Please try our AP mode, which is more compatible. If the AP mode fails again, send your App account id to martinjerry01@outlook.com .Our Engineers will check and reply you within 12h.

How to Access AP mode?

1. Press the tiny restart button under the main power button to restart the switch. You will see the indicator is in constant RED.
2. Press and hold the power button for 5-8s until the indicator blinks **quickly** in RED.
3. Press and hold the power button for 5-8s until the indicator blinks **slowly** in RED.

How to Pair in AP mode?

Follow the pairing process (Step 1 to Step 3) above, and choose AP Mode on the 4th step. Then it will guide you to connect a hotspot like “SmartLife ...”

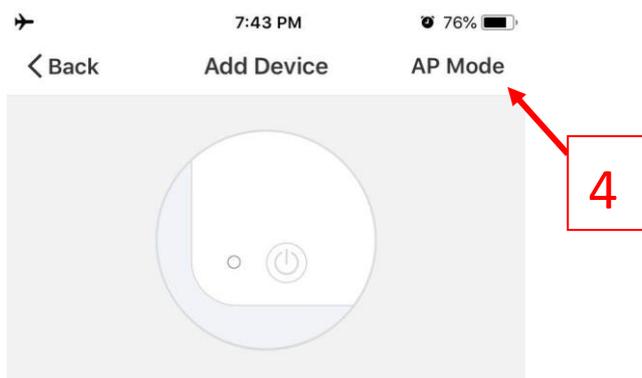

Power on the device and confirm that indicator light rapidly blinks

[How to make indicator rapidly blink](#)

Confirm indicator rapidly blink